

SPECIFICATIONS MODEL 4505 (Cat. No. 304505)

Model 4505 DB9 ABCD Switch with Manual Operation

• Ideal for device-sharing applications; Applicable to ANY DB9 interface devices

INTRODUCTION

The Model 4505 DB9 ABCD Switch allows the user to reroute data between any one of four devices to one COMMON device with the simple rotation of a selector switch. All nine pins of the DB9 interface are supported. No need to plug and unplug interconnection cables thereby eliminating connector wear and/or errors when reconfiguring networks.

FEATURES


- Allows quick connection to any one of four devices from one COMMON device.
- High quality sealed switch with self wiping contacts.
- Transparent to data format.
- All 9 leads are switched.
- Eliminates the need to plug and unplug cables.
- Manual operation, no power required.
- All metal enclosure reduces EMI/RFI interference.
- Miniature package dimensions: 1.75" H X 4.3" W x 6.5" D.
- Custom length DB9 cables available for your switch installation.



SPECIFICATIONS:

PORT CONNECTORS: (5) DB9 female connectors labeled A, B, C, D, and COMMON.
FRONT PANEL CONTROL: (1) Front panel rotary switch allows selection of switch position.
POWER: No power required.
DIMENSIONS: 4.3" W x 1.75" H x 6.5" D.
WEIGHT: Approximately 2.0 lbs.

Custom Length DB9 cables available for your switch installation. State cable length (XXX) when ordering.	
Part Number	Description
990127-XXX	XXX Feet, DB9 F/F, 9-Conductor Unshielded PVC Cable
990125-XXX	XXX Feet, DB9 M/F, 9-Conductor Unshielded PVC Cable
990126-XXX	XXX Feet, DB9 M/M, 9-Conductor Unshielded PVC Cable

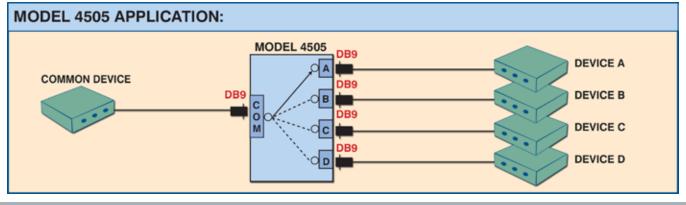

www.ElectroStandards.com E-mail:eslab@ElectroStandards.com