

Model 5527A SVCN/GPCN/OFFLINE Display Indicator Unit


- **Conference Room Application: Model 5527A Displays the GPCN/SVCN/OFFLINE Status of the Model 5528A Switch.**

INTRODUCTION

The Model 5527A is designed to display the isolation/connection status of communications equipment. This equipment comprises a switching system that includes the Model 5528A Single Channel 3-State Cat5e switch. Users can link these units to create a robust conference communications switching system. The dimensions of the Model 5527A are 1.75"H x 8"D x 19"W and the unit mounts in a standard 19" equipment rack. The unit weight is approximately 2.0 lbs.

FEATURES

- The front panel LED Display on the Model 5527A will display the SVCN/GPCN/OFFLINE status of the Model 5528A switch.
- Display Indicator unit connects to status port of the Model 5528A switch.
- Display is always showing one of the three possible states of the companion switch.
- Power for the LED's of the Model 5528A switch is provided via the Control port of the Model 5527A Display Indicator Unit.
- Installs in a standard 19" wide equipment rack. Occupies only 1U height (1.75").
- Power: UL approved 120 VAC, 60 Hz wall mount power module supplies 12VDC, 500mA to the unit.

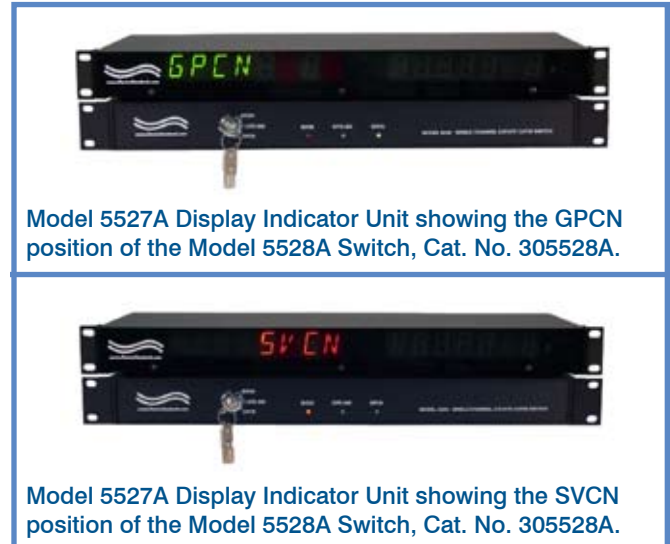

OPTION: WIDE RANGE POWER MODULE

(Cat No 517277) CE and UL listed table mount power module, 100VAC/240VAC, 50Hz/60Hz in place of standard 115VAC or 120VAC power module. Ideal for international applications.

Conference Room Application: Model 5527A Displays the GPCN/SVCN/OFFLINE Status of the Model 5528A Switch.

