# SPECIFICATIONS MODEL 7371

Cat. No. 307371

# Model 7371 Single Channel Cat6A RJ45 A/B/C Switch, with Serial Remote Control Port

- Certified For Cat6A Compliance!
- Utilizes High Performance Shielded RJ45 Connectors.

#### INTRODUCTION

The PathWay® Model 7371 Single Channel Cat6A RJ45 A/B/C Switch with Serial Remote Control allows the user the capability of sharing a single RJ45 Cat6A interface device connected to the Common port among three other devices connected to the "A", "B", and "C" ports with remote access functionality. Remote Control access can be accomplished using ASCII RS232 commands. The Model 7371 dimensions are 19" W x 1.75" H x 10" D.



- Allows access to three RJ45 Cat6A interface networks from one COMMON RJ45 Cat6A interface network or device.
- Switches all 8 pins of the RJ45 interface.
- Eliminates the need to plug and unplug cables.
- Transparent to data speed and format.
- Certified for Cat6A compliance.
- Local control via front-panel pushbuttons.
- Remote control port allows off-site monitoring and switch management.
- The REMOTE port accepts RS232 Serial Data ASCII commands for switch management.
- Front-panel pushbutton control can be locked out, remotely.
- Front-panel LED's display switch position and power status.
- Retains last switch position in the event of power loss and continues to pass data.
- Attractive anodized black box packaging provides EMI/RFI shielding.
- Custom length RJ45 Cat6A cables available for your switch installation. Request Quote.



### **SPECIFICATIONS:**

**PORT CONNECTORS:** (4) RJ45(F) shielded connectors, A, B, C, and COMMON.

**COMPLIANCE:** Interface meets or exceeds **Cat 6A** performance.

**CONTROLS:** (3) Pushbuttons to select A, B or C. **DISPLAY:** (3) Red LED's display switch position and indicate power presence.

**REMOTE CONTROL:** (1) DB9 (F) connector on rear panel accepts ASCII RS232 Serial Data for Remote Control operation.


**POWER:** UL approved 100VAC/240VAC, 50Hz/60Hz wall mount power module supplies 12 VDC, 500 mA to the unit.

**DIMENSIONS:** 19.0" W x 1.75" H x 10.0" D. (48.3 x 4.4 x 25.4 cm)

WEIGHT: Approximately 5.5 lbs. (2.5 Kg)

## **OPTION: WIDE RANGE POWER MODULE**

(Cat No 517277) **CE and UL** listed table mount power module, 100VAC/240VAC, 50Hz/60Hz in place of standard 115VAC or 120VAC power module. **Ideal for international applications.** 

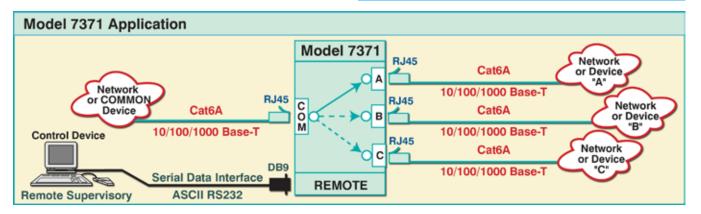

36 Western Industrial Drive, Cranston, RI 02921 Tel: 401-943-1164 Fax:401-946-5790 www.ElectroStandards.com E-mail:eslab@ElectroStandards.com