

## SPECIFICATIONS MODEL 9434 Cat. No. 305434

# Model 9434 DB9 A/B/C/D Switch, Manual, Rackmount

• Ideal for device-sharing applications; Applicable to ANY DB9 interface devices.

## INTRODUCTION

The Model 9434 DB9 ABCD Switch allows the user to reroute data between any one of four devices to one COMMON device with the simple rotation of a selector switch. All nine pins of the DB9 interface are supported. No need to plug and unplug interconnection cables thereby eliminating connector wear and/or errors when reconfiguring networks.

### **FEATURES**

- Allows quick connection to any one of four devices from one COMMON port.
- Manual operation via front-panel rotary switch.
- High quality sealed switch with self-wiping precious metal contacts.
- Eliminates the need to plug and unplug cables.
- Transparent to data speed and format.
- All 9 pins of the DB9 interface are switched.
- No external power required.
- Attractive anodized black box packaging provides EMI/RFI shielding.
- Custom length DB9 cables available for your switch installation.
- Lifetime guarantee.



### **SPECIFICATIONS:**


**PORT CONNECTORS:** (5) DB9 female connectors labeled A, B, C, D, and COMMON. **FRONT PANEL CONTROL:** (1) Rotary switch on front panel selects A, B, C, or D.

**POWER:** No power required. Manually operated.

**DIMENSIONS:** 19.0" W x 1.75" H x 8" D. (48.3 x 4.4 x 20.3 cm)

WEIGHT: Approximately 4.5 lbs. (2.0 Kg)

Custom Length DB9 cables available for your switch installation. State cable length (XXX) when ordering.	
Part Number	Description
990127-XXX	XXX Feet, DB9 F/F, 9-Conductor Unshielded PVC Cable
990125-XXX	XXX Feet, DB9 M/F, 9-Conductor Unshielded PVC Cable
990126-XXX	XXX Feet, DB9 M/M, 9-Conductor Unshielded PVC Cable

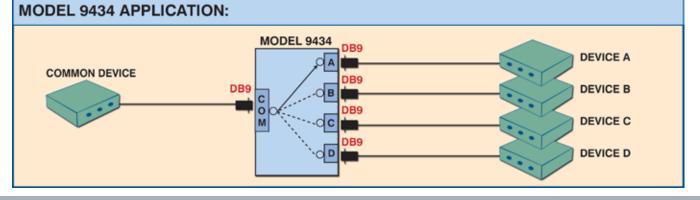

www.ElectroStandards.com E-mail:eslab@ElectroStandards.com